

**S301****S302**

Fingerprint



PIN



RFID


S301 & S302

Standalone Time Attendance Terminal

Standard Functions

- 3 -inch TFT color display
- Built-in Serial and Ethernet ports
- Multi-language support
- Audio/Visual indications for acceptance and rejection of valid/invalid transactions
- Function keys to select the IN or OUT status of the punches
- Feedback with voice prompts
- Hid version S301-HID

Installation

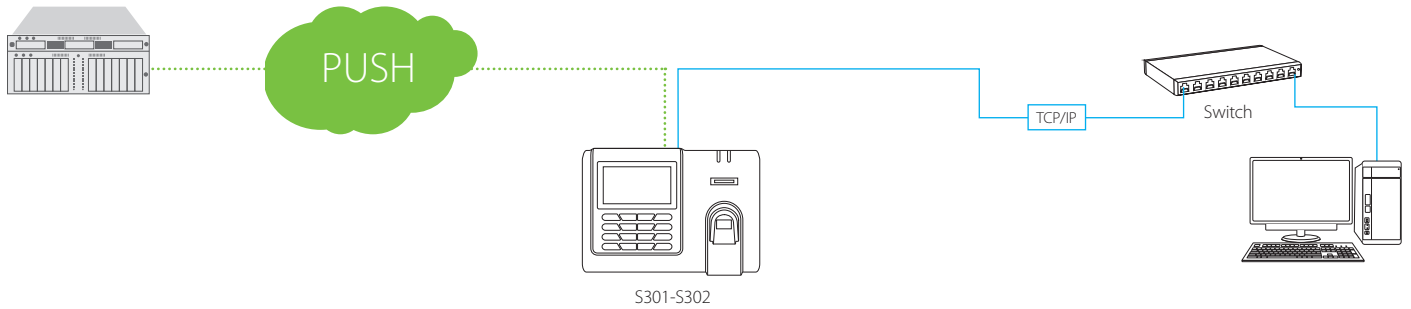

Specifications

Display

Color LCD screen

Capacity

ID Cards: 30,000

Transactions: 100,000

Communications

RS232/485

Ethernet

USB-Host

Standard Functions

Work Code

SMS

DLST

Self Service Query

Automatic Status Switch

Scheduled bell

5-digit user ID

Power

5V DC - 2A

Environment

Operating Temperature: 32° F to 113° F (0° C to 45° C)

Operating Humidity: 5% to 80%

Dimensions

Width : 7.3 in. (18.5 cm)

Height: 5.35 in. (13.6 cm)

Depth: 1.96 in. (5 cm)

Gross Weight: 2.64 lbs. (1.2 kg)

What's in the Box



Design and Specifications subject to change without notice

ZKTeco

200 Centennial Avenue, Suite 211, Piscataway, NJ 08854, USA

+1 732-412-6007 +1 732-412-6008

sales@zktechnology.com | zktechnology.com