

# US15 C

## Data Collection Terminal

Choice of Proximity, Barcode, Magnetic Stripe or Fingerprint

Reader in a compact design













**US15C-ID**Fingerprint reader



**US15CR**Proximity card reader



**US15C-B**Barcode card reader



**US15C-MAG**Magnetic card reader


### Standard Function

- Wi-Fi as a standard feature on all devices
- User friendly UI and menu system design
- Hardware level clock authentication
- Support for local and external data/system backup
- User level duplicate punch prevention
- Tip entry support
- Multiple level job code support
- Customizable user access control privileges
- Enhanced network security
- Web server support as a standard function

- Automatic status key switch
- Self-Service API
- 9 Digits User ID
- · Daylight savings time
- Customizable bell schedules
- Private or public SMS messaging support
- USB-host
- User Attendance search
- PUSH and Standalone SDK compatibility with TFT 2.0
- Enhanced encryption system for data integrity and security

<sup>©</sup> Copyright 2022. ZK Technology LLC. Dba. ZKTeco. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

### Installation

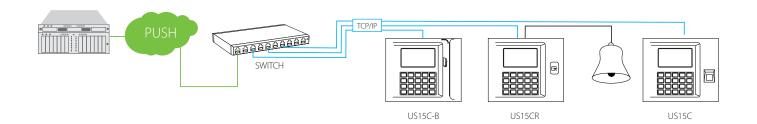

### Specifications

#### Capacity

ID Cards: 10,000 Transactions: 100,000 Fingerprint templates: 3,000

#### **Fingerprint Sensor**

ZK2750P

#### Display

3.0 in. TFT Color Screen Communications RS232, Ethernet, USB-Host, Wi-Fi

#### Power

12 V DC, 1.5 A

Optional: 12V POE injector (sold separately) Optional: 12V Battery Backup (sold separately)

#### **Environment**

Operating Temperature: 32° F to 113° F (0° C to 45° C) Operating Humidity: 5% to 80%

**Supported Devices** 

US15C-ID Fingerprint and standard RFID prox reader US15C-HID Fingerprint and HID prox reader US15C-MAG Magnetic card reader US15C-B Barcode card reader **US15CR** Standard RFID prox reader US15CR -HID Standard HID prox reader

#### **Dimensions**

Width: 6.5 in. (16.5 cm) Height: 5.5 in. (14 cm) Depth: 1.8 in. (4.6 cm) Weight: 0.95 lbs. (0.43 kg)

### What's in the Box









AC Power Adapter



External Relay Connectors



Serial Cable



Network Cable



Screws, anchors & Screwdriver



ID card



Design and Specifications subject to change without notice

ZKTeco

200 Centennial Avenue, Suite 211, Piscataway, NJ 08854, USA





sales@zktechnology.com | zktechnology.com

