



US922

Portable Fingerprint Data Collection Terminal

Waterproof, Dustproof & Shockproof

Biometric Performance

Reliable, durable and highly accurate ZK fingerprint sensor with latest algorithm provides less than 1.5 second user recognition.

Communication

S922 installs easily on your network and supports both hard-wired TCP/IP and optional wireless connections like Wi-fi.

Easy Operation and Management

Works without computer. Complete setup and programming can be done via keypads and embedded firmware. Graphical User interface on a 3.5 inch TFT display for rich user experience. Audio-Visual Indication for acceptance and rejection of valid/invalid fingerprints.

Capacity

Supports up to 5,000 fingerprint templates, expandable to 10,000 templates, 30,000 cards/badges. All models support up to 200,000 transactions.

Rugged Enclosure

The reader is protected with a rubberized sleeve so that it can withstand shocks and rough and tough use. It also has a flexible handle so that it is easy to carry from place to place

Large Capacity Battery

S922 comes standard with 7600 mAh battery which has 16 hours of operation time and 28 hours of standby time.


Options

S900 Series readers can be configured with optional internal Wi-Fi module, and either HID Prox, HID iClass and 13.56 MHz Mifare cards.

For Software Developers

Free SDK and development tools are available for developers/partners who wish to integrate S922 with any application which requires verifying people. Custom development is also available for OEM partners upon request.

Configuration

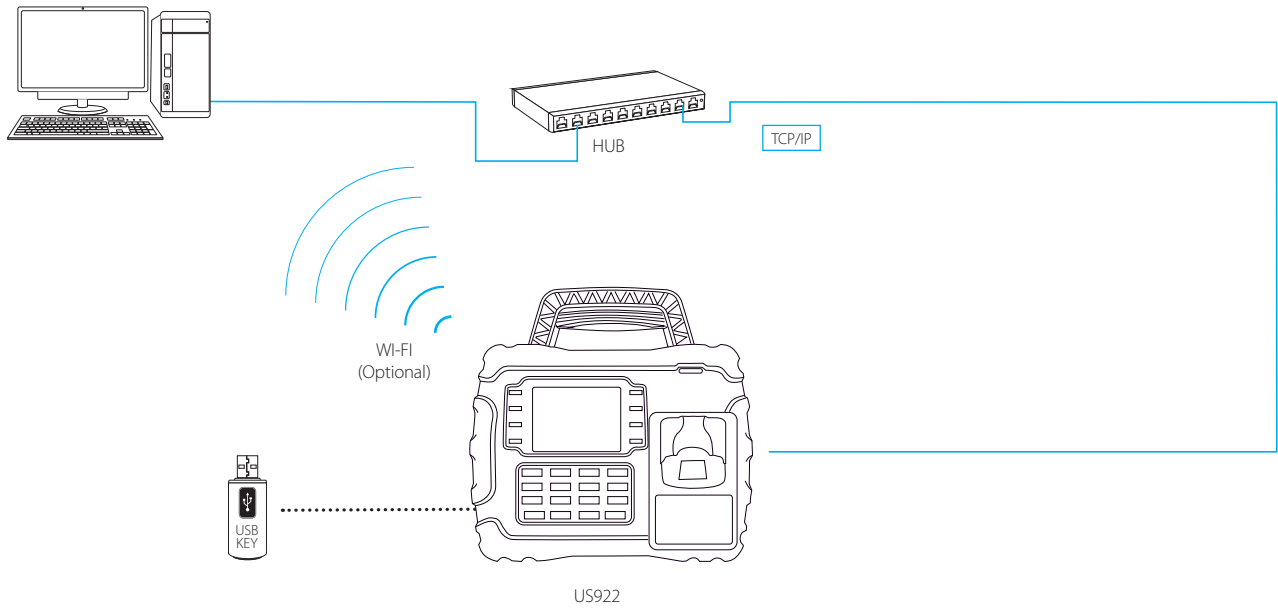

Specifications

Capacity

Fingerprint: 5,000, Optional: 10,000
Transactions: 200,000

Display

3.5 in. TFT Color Display

Standard Functions

Workcode, SMS
Self-service query
Scheduled bell

Communication

Ethernet, USB-Host, **Optional:** WiFi

Power

12V DC, 3A
Built-in Backup 7600 mAh Battery

Environment

Operating Temperature:
32° F to 113° F (0° C to 45° C)
Operating Humidity:
20% to 80%

Supported Options

RFID

Dimensions

Width: 8.75 in. (22.5 cm)
Height: 8.75 in. (22.5 cm)
Depth: 4.3 in. (11 cm)
Weight: 3 lbs. (1.36 kg)


Part Numbers

S922 HID with HID card reader
S922-WIFI with Wi-Fi connectivity
S922-M with Mifare card reader


What's in the Box



US922



AC Power Adapter



Backup battery



Network Cable



ID card



Design and Specifications subject to change without notice

ZKTeco
200 Centennial Avenue, Suite 211, Piscataway, NJ 08854, USA
+1 732-412-6007 +1 732-412-6008
sales@zktechnology.com | zktechnology.com