



# US922

Portable Fingerprint Data Collection Terminal

**Waterproof, Dustproof & Shockproof**



## Biometric Performance

Reliable, durable and highly accurate ZK fingerprint sensor with latest algorithm provides less than 1.5 second user recognition.



## Communication

S922 installs easily on your network and supports both hard-wired TCP/IP and optional wireless connections like Wi-fi.



## Easy Operation and Management

Works without computer. Complete setup and programming can be done via keypads and embedded firmware. Graphical User interface on a 3.5 inch TFT display for rich user experience. Audio-Visual Indication for acceptance and rejection of valid/invalid fingerprints.



## Capacity

Supports up to 5,000 fingerprint templates, expandable to 10,000 templates, 30,000 cards/badges. All models support up to 200,000 transactions.



## Rugged Enclosure

The reader is protected with a rubberized sleeve so that it can withstand shocks and rough and tough use. It also has a flexible handle so that it is easy to carry from place to place



## Large Capacity Battery

S922 comes standard with 7600 mAh battery which has 16 hours of operation time and 28 hours of standby time.



## Options


S900 Series readers can be configured with optional internal Wi-Fi module, and either HID Prox, HID iClass and 13.56 MHz Mifare cards.



## For Software Developers

Free SDK and development tools are available for developers/partners who wish to integrate S922 with any application which requires verifying people. Custom development is also available for OEM partners upon request.

## Configuration

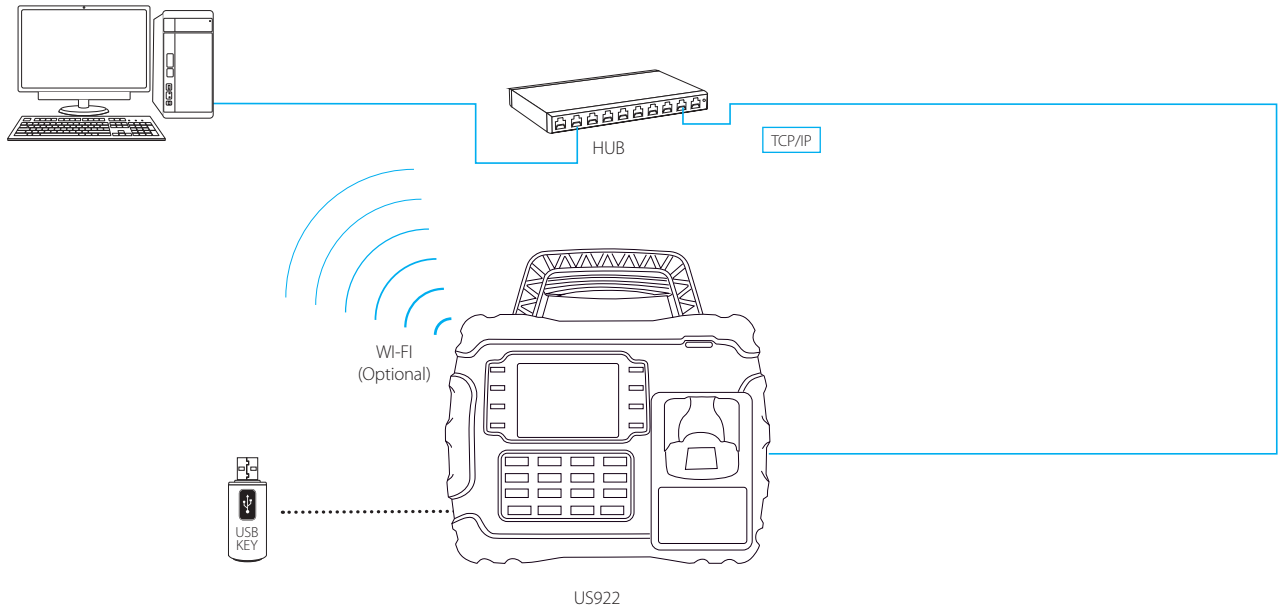

## Specifications

### Capacity

Fingerprint: 5,000, Optional:10,000  
Transactions: 200,000

### Display

3.5 in. TFT Color Display

### Standard Functions

Workcode, SMS  
Self-service query  
Scheduled bell

### Communication

Ethernet, USB-Host, *Optional:* WiFi

### Power

12V DC, 3A  
Built-in Backup 7600 mAh Battery

### Environment

Operating Temperature:  
32° F to 113° F ( 0° C to 45° C)  
Operating Humidity:  
20% to 80%

### Supported Options

RFID

### Dimensions

Width: 8.75 in. (22.5 cm)  
Height: 8.75 in. (22.5 cm)  
Depth: 4.3 in. (11 cm)  
Weight: 3 lbs. (1.36 kg)


## Part Numbers

**S922 HID** with HID card reader  
**S922-WIFI** with Wi-Fi connectivity  
**S922-M** with Mifare card reader


## What's in the Box



US922



AC Power Adapter



Backup battery



Network Cable



ID card



Design and Specifications subject to change without notice

**ZKTeco**  
200 Centennial Avenue, Suite 211, Piscataway, NJ 08854, USA  
+1 732-412-6007 +1 732-412-6008  
sales@zktechnology.com | zktechnology.com